


AquaDrain® SD

(1)

1

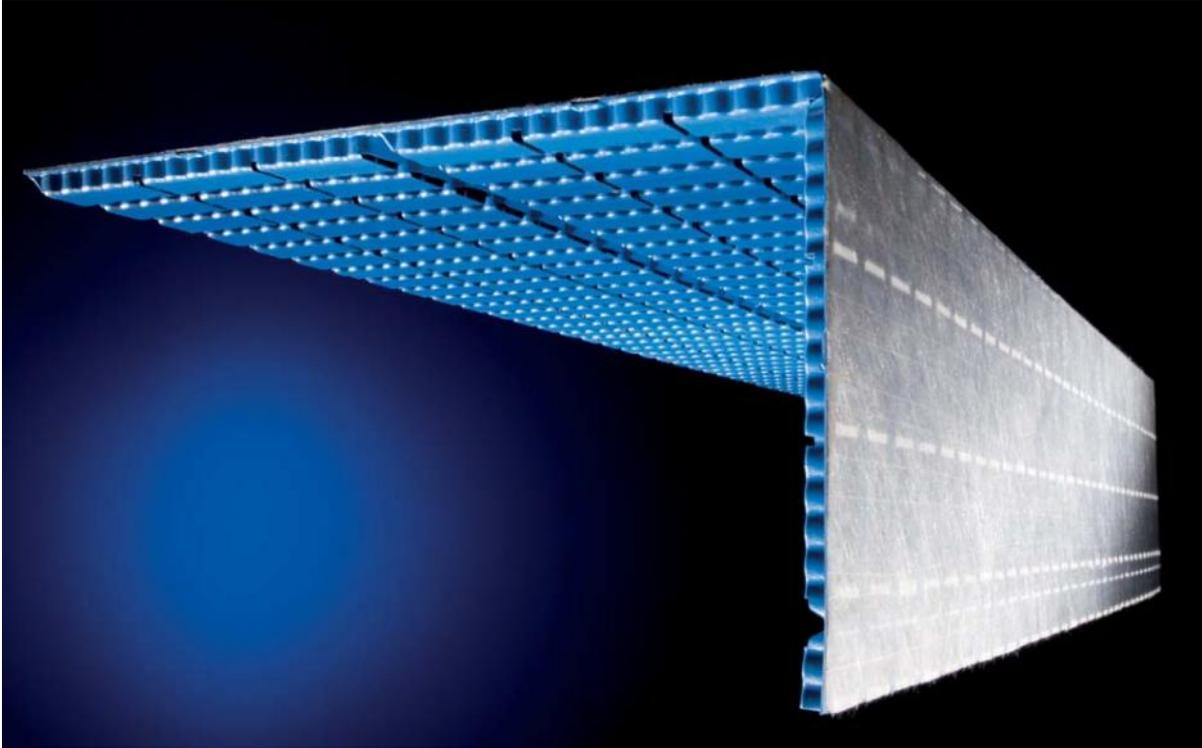

AquaDrain® SD (1):	AquaDrain® SD (90°):
.	.
,	,
;	;
.	.
:	:
.	.
,	,
.	.



... > 1%.

() AquaDrain® SD (1)

(3-5) 2.2 AquaDrain® SD (1), 0,5 () .2 + .5 -

1. AquaDrain® SD (1) AquaDrain® SD (1)

Waterc® 3.

2. AquaDrain® SD


2.1 AquaDrain® SD (1) - AquaDrain® SD () DNV „)

(2-8) 3-5) 5.

0,4 (0,2 + 0,5 , 0,3) 6.


(), (,)

AquaDrain® SD (1)

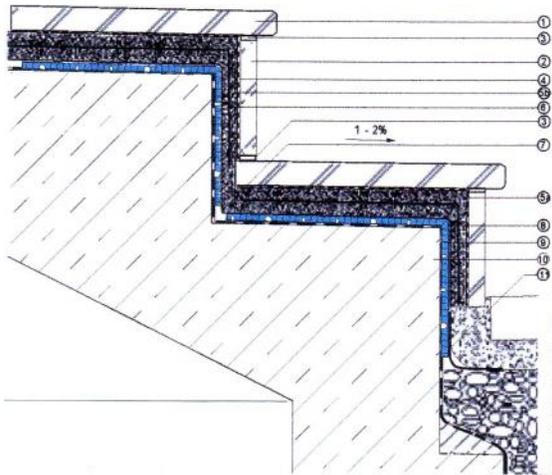


- 1 / .
- 2 / .
- 3
- 4 / / .
- 5a: : / . - (") (")
- 5b: : (") 3-5 , - 2-8 ")
- 6 AquaDrain® SD
- 7 Watec® BW
- 8 AquaDrain® SD (1)
- 9 ("):
- 10
- 11


AquaDrain® SD (1)

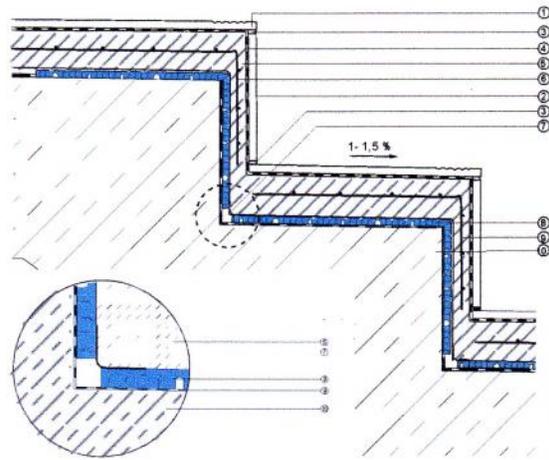

- 1
- 2
- 3
- 4 (") /
- 5 / (")
- 6 AquaDrain® SD
- 7 Watec® BW
- 8 AquaDrain® SD (1)
- 9 ("):
- 10

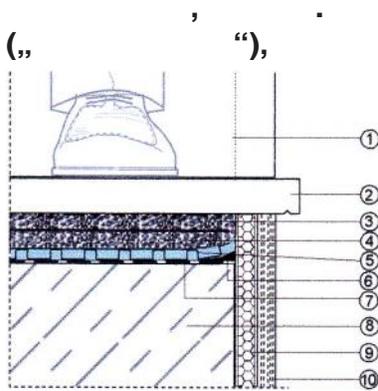


- 1 , 6
- 2 ,
- 3 ,
- 4 AquaDrain® SD 7 (")
- 5 AquaDrain® SD (1), 8 , 8
- 9
- 10

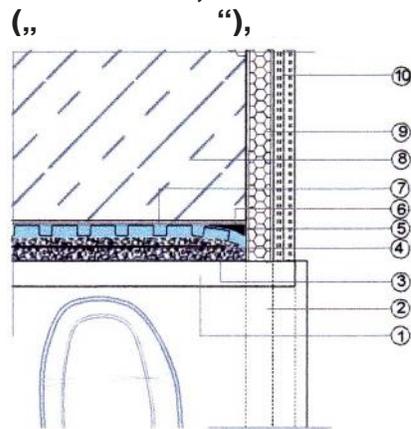


- 1 , 6
- 2 ,
- 3 ,
- 4 AquaDrain® SD 7 (")
- 5 AquaDrain® SD (1), 8 , 8
- 9
- 10


AquaDrain® SD
(1)




AquaDrain® SD



AquaDrain® SD



Watec® BW ()



<p>AquaDrain® SD (1) –</p> <p>() ,</p> <p>- 8</p> <p>AquaDrain® SD</p> <p>38/38 (Ø 1,6) ,</p> <p>AquaDrain® SD (1): - 30 °C + 70 °C</p> <p>(- 80 °C).</p>	<p>AquaDrain® SD (1): /5 ;</p> <p>1.000 , 180 , 310</p> <p>AquaDrain® SD: /5 ;</p> <p>1.000 , 160 , 290</p> <p>AquaDrain® SD: /10 ;</p> <p>1.000 , 1.000</p> <p>AquaDrain® SD (1): 2.000 / 2</p> <p>AquaDrain® SD (1): . 66%</p>
--	---

AquaDrain® SD.



GUTJAHR Innovative Bausysteme GmbH
Philipp-Reis-Str. 5-7 · D-64404 Bickenbach
Tel. +49 (0) 62 57/93 06-0 · Fax 93 06-31
www.gutjahr.com